
Anwendung/Application :

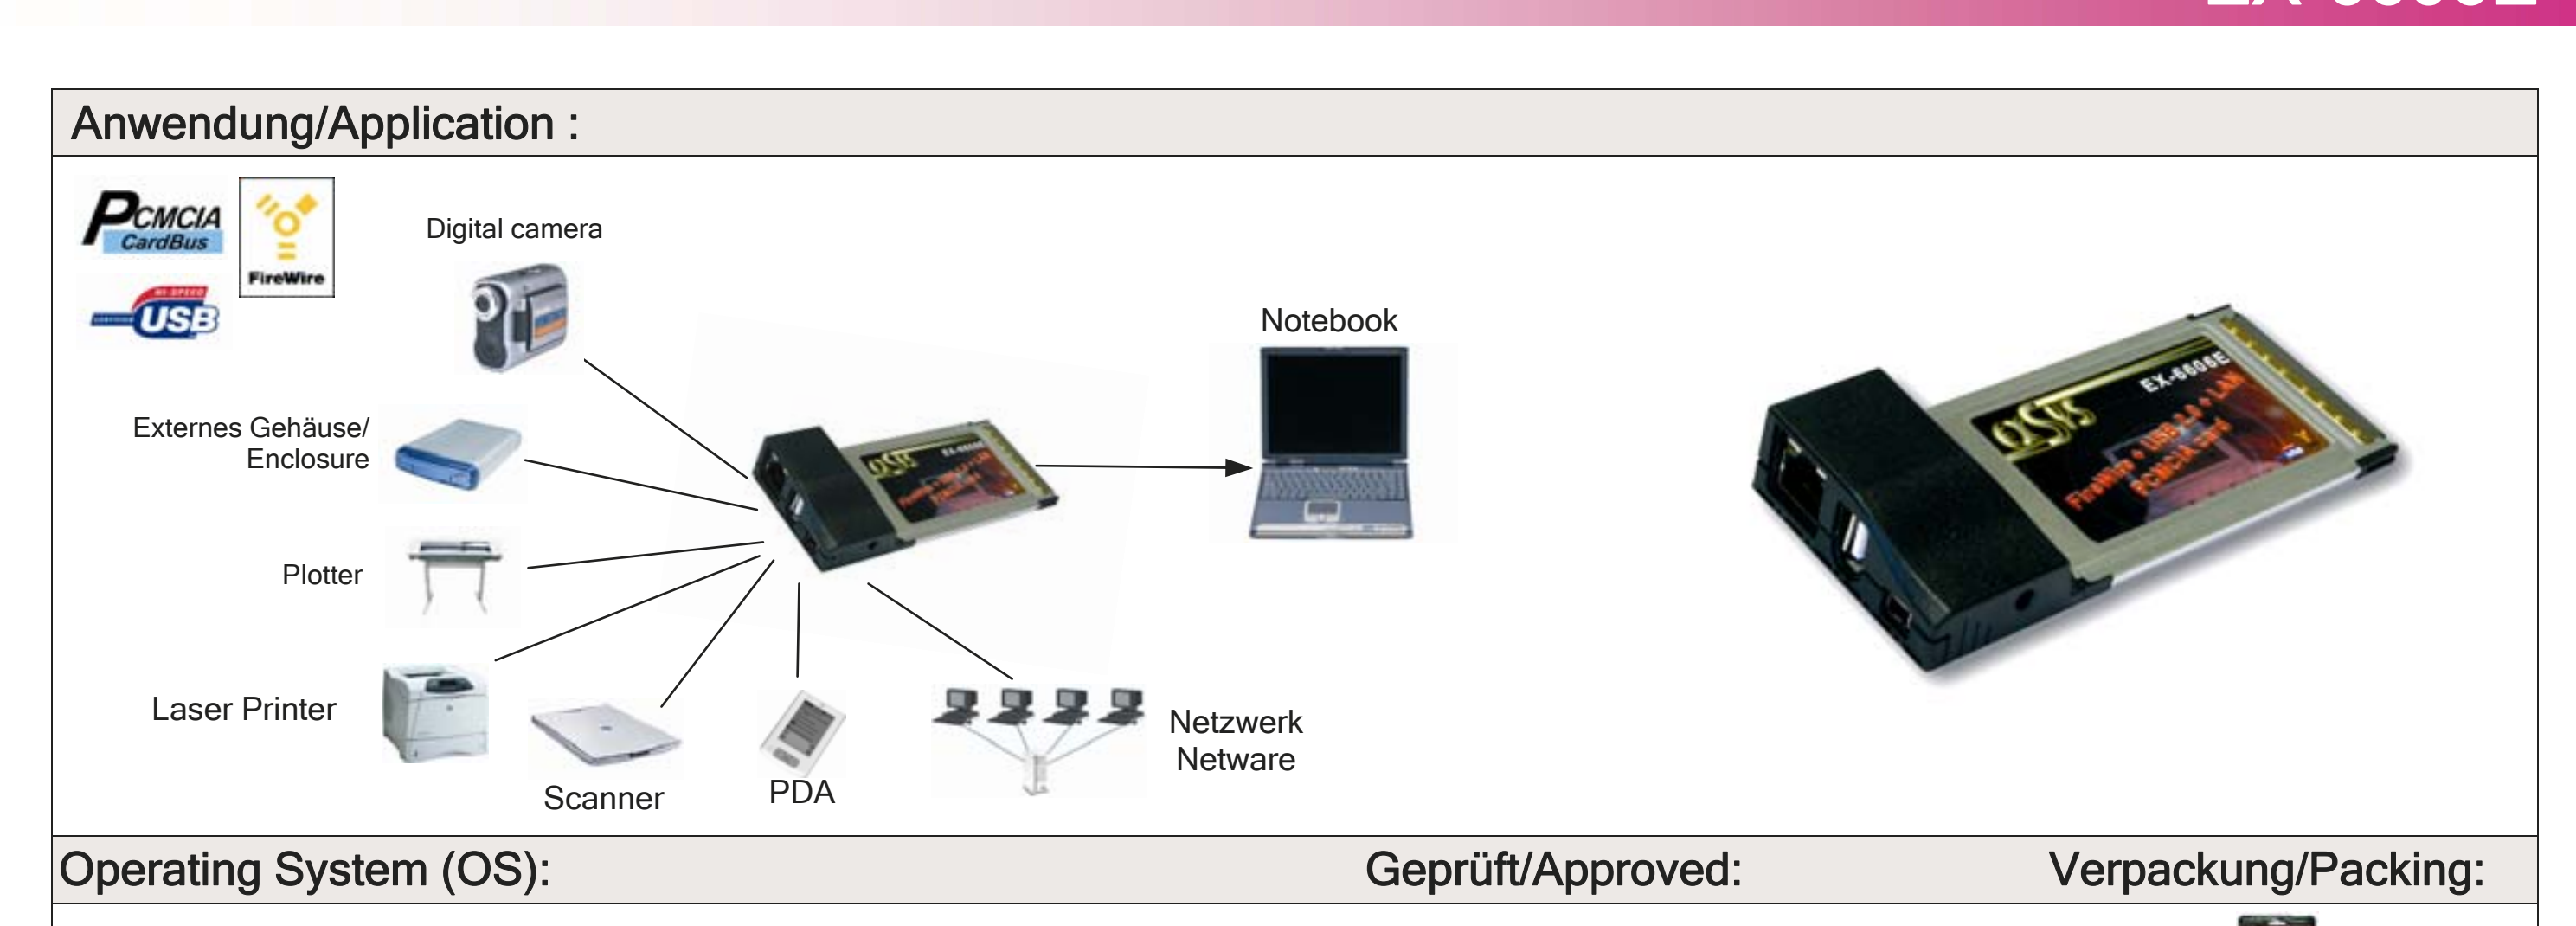

Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
98 SE, Me, 2000, XP, Server 2003, Windows Vista	CE FC RoHS	

PCMCIA FireWire 1394a + USB 2.0 + LAN

Beschreibung :	• Die EX-6606E 1394a (FireWire400), USB 2.0 und LAN 10/100Mbps PCMCIA ist eine Zusatzkarte für den PCMCIA Bus um das Notebook mit zusätzlichen FireWire 1394a, USB 2.0 und Netzwerk 10/100Mbps Ports zu erweitern. Somit können weitere 1394a und USB 2.0 Geräte an das Notebook angeschlossen werden.
Merkmale FireWire 1394a: Merkmale USB 2.0: Merkmale LAN:	• PCMCIA 32-Bit FireWire IEEE 1394 CardBus mit zwei Anschlüssen • Unterstützt bis 63 Peripheriegeräte • PCMCIA USB 2.0 CardBus mit zwei Anschlüssen • Integrierter Dual-Speed USB Transceivers • Unterstützt alle USB 1.1 bis 2.0 kompatiblen Peripheriegeräte PCMCIA Netzwerk Karte mit 10Base-T und 100Base-TX IEEE802.3, 802.3u Protokoll Automatische Erkennung der Datenübertragung von 10Mbps oder 100Mbps
Chip-Set :	• Texas Instruments TI OHCI-Lynx, NEC und Realtek
Datentransfer-Rate :	• FireWire 1394A: bis 400Mbps / USB 2.0: bis 480Mbps / Netzwerk: 10 oder 100Mbps
Anschlüsse :	• 2 x USB 2.0 A-Buchse / 1 x 4 Pin FireWire 1394a Buchsen • 1 x RJ-45 LAN
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• PCMCIA CardBus 32-Bit
Abmessung / Gewicht :	• 117 x 54mm / 350g
Lieferumfang :	• EX-6606E, Treiber CD, Handbuch

PCMCIA FireWire 1394a + USB 2.0 + LAN

Description:	• The EX-6605E 1394a (FireWire400) and USB 2.0 PCMCIA provides a reliable solution for Notebook computers to connect to FireWire 1394a and USB 2.0 peripherals over the PCMCIA Slots.
Feature FireWire 1394a: Feature USB 2.0: Feature LAN:	• PCMCIA with two FireWire 1394a ports • Support up to 63 devices • PCMCIA USB 2.0 CardBus with two ports • Integer dual-speed USB transceivers • Support all USB 1.1 to 2.0 compatible peripheral devices • PCMCIA Netware card with 10Base-T and 100Base-TX • IEEE802.3, 802.3u protocol • Automatically recognize of data transfer 10Mbps or 100Mbps
Chip-Set :	• Texas Instruments TI OHCI-Lynx, NEC and Realtek
Data transfer rate :	• FireWire 1394A: up to 400Mbps / USB 2.0: up to 480Mbps / LAN: 10 or 100Mbps
Connectors :	• 2 x USB 2.0 female / 1 x 4 pin FireWire 1394a female • 1 x RJ-45 LAN
Operating Temperature : Operating Humidity :	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• PCMCIA CardBus 32-Bit
Size / Weight :	• 117 x 54mm / 350g
Packaging contents :	• EX-6606E, Driver CD, Manual